OMEGA
OMEGA ELECTRICALS

CABLE CLEAT

A device used to securely hold cables in place and prevent movement or damage







www.omegaelectricals.com


sales@omegaelectricals.com

Cable Cleats Industrial

Suitable for cables with diameters ranging from **51 mm to 159 mm.**

- Two-piece design with dual fixings for secure installation.
- Supports double stacking on a single fixing for space efficiency.
- Plain finish suitable for indoor/dry/industrial or unpolluted outdoor environments; epoxy coating recommended for harsh conditions.
- Reliable operation from **–60°C to +100°C.**



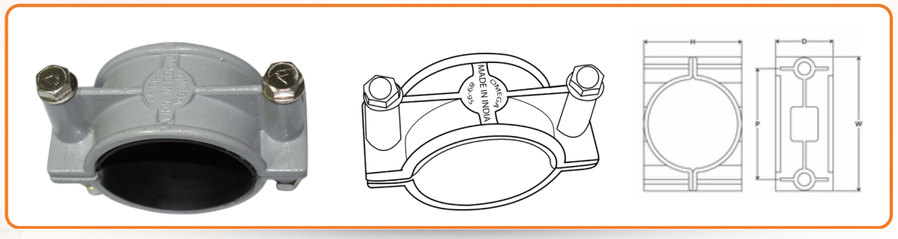

Cable Cleat Selection Table

LINE ITEAM # 1

Cable Diameter		Cleat Details					
Min	Max	W	H	D	P	Fixing Hole	Product Code
51	57	96	68	59	76	M10	ATC 51-57A
57	64	96	75	49	76	M10	ATC 57-64A
64	70	96	84	64	118	M10	ATC 64-70A
70	76	134	90	64	114	M10	ATC 70-76A
76	83	142	96	64	114	M12	ATC 76-83A
83	89	142	102	64	114	M12	ATC 83-89A
89	95	154	114	64	114	M12	ATC 95-101A
95	101	154	120	76	126	M12	ATC 101-108A
101	108	169	134	76	140	M12	ATC 108-114A
108	114	169	140	76	149	M12	ATC 76-83A
115	125	185	130	62	157	M12	ATC 83-89A
125	135	190	149	75	160	M12	ATC 89-95A
135	140	195	155	85	166	M12	ATC 95-101A
140	146	207	162	85	179	M12	ATC 101-108A
146	152	213	168	85	185	M12	ATC 108-114A
152	159	220	174	90	192	M12	ATC 114-125A


© 2026. All rights reserved by Omega

ALUMINIUM
CABLE CLEATS

Trefoil Type ATFC (SP)



- Sutable for use with **L.V, M.V**, and **HV** cables
- Fine range accommodates wide range of cable dia
- Operating Temperature: **-40°C = 100°C**

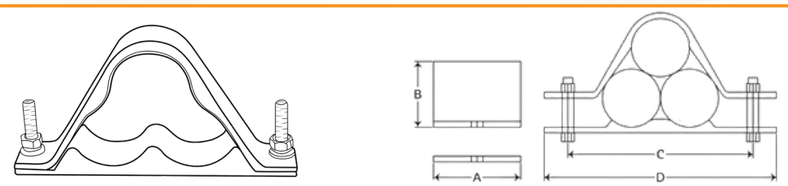


Cable Cleat Selection Table

LINE ITEAM # 2

Cable Diameter		Cleat Details				
Min	Max	A	B	C	D	Product Code
15	35	30	45	108	80	ATFCSP 15-35A
35	45	30	66	151	120	ATFCSP 35-45A
45	60	40	85	184	151	ATFCSP 45-60A
60	75	40	114	226	193	ATFCSP 60-75A
75	90	40	142	267	235	ATFCSP 75-90A
90	107	50	171	319	282	ATFCSP 90-107A
107	129	57	203	390	352	ATFCSP 107-129A
129	155	57	244	455	397	ATFCSP 129-155


- Manufactured From **Aluminium Alloy**
- Epoxy Coated
- Rubber Linear Optionally available
- **Epoxy** coated version available for harsh environments/outdoor.
- Optional **Neoprene** & **EPDM** liner available.
- In accordance with BS EN 61914:2009.

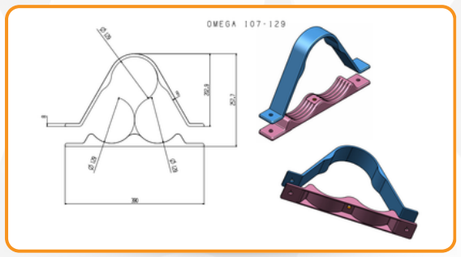

© 2026. All rights reserved by Omega

OMEGA

OMEGA ELECTRICALS

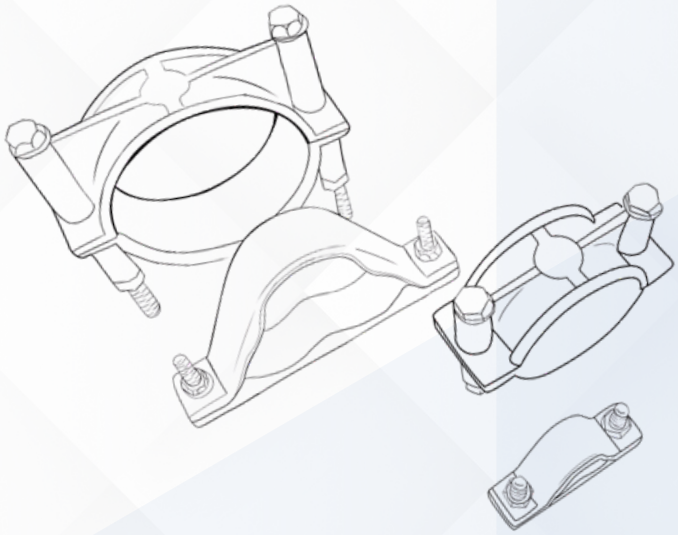

+91-9506631786

sales@omegaelectricals.com

www.omegaelectricals.com

Head Office: Wdhawa wise city unit - 907, Navi Mumbai, Maharastra, India.

Registerd Office: Omega Complex, Chak, Hari Har VAN Lilapur, Jhunsi Prayagraj - 211019, India.